# TRANSPORT GUIDELINES

## Hiab range, basic lift plan





## **TRANSPORT GUIDELINES**

- 8/10/20ft Delivery We carry out deliveries/collections with our subcontracted hauliers for our 8ft, 10ft or 20ft units to your site with a 38ft long x 9ft wide rigid hi-ab vehicle.
- 1. 40ft Delivery The delivery/collection for an 40ft unit to your site will need to be made on a 63ft long x 9ft wide artic vehicle.
- 1. Clearance We will require the vehicle to gain entry to site/location successfully 28ft clearance in height (to lift) and a minimum of 10ft clearance in width.
- Site requirements Your site must have level, hard standing access (Unit Hire's sub-contracted hauliers will not drive over fields, grass, muddy areas or uneven ground) If your site has one or more of these problems, we will need to arrange for our subcontracted hauliers transport manager to attend site to carry out a site survey prior to delivery/collection which is charged at around £150.00+VAT dependent on haulier.
- 1. Public offloads If you require us to offload our units whilst being on a public highway, then you will need to **obtain a permit from your local counci**l, prior to delivery/collection.
- Delivery times Due to factors outside our control (traffic, hold up on sites, etc.) we cannot guarantee timed deliveries/collections. All transport is made between the hours of 8am - 7pm.
- Satisfaction confirmation Please ensure you are satisfied with the container(s) and unit(s) are level, doors open/shut correctly and padlock (if ordered) works. By signing for the delivery you are confirming units are satisfactory. If any queries, you must get in touch with the office before driver leaves site.

### **IMPORTANT**

By choosing to purchase or hire any equipment from Unit Group, you are acknowledging and agreeing to comply with the terms and conditions outlined in the following transport guidelines.

We require a full 48hr's notice prior to delivery/collection on a working day (weekend/bank holidays not included) for cancellation.

While we make every effort to plan and schedule deliveries based on agreed dates, it is important to note that **we cannot provide a 100% guarantee on delivery dates**. There are factors beyond our control, such as traffic conditions, road closures, driver illness, and unforeseen issues at depots, that may impact the delivery schedule. We appreciate your understanding and assure you that we will do our best to minimise any disruptions and keep you informed of any changes that may arise. We understand the importance of specific delivery dates, if urgency is a factor, we recommend considering a paid premium AM delivery slot. This option allows for the entire day to accommodate any unforeseen circumstances, although it is important to note that even with this selection, we cannot provide an absolute guarantee. We strive to prioritise timely deliveries and appreciate your understanding in situations that may arise beyond our control.

#### We will need to be informed of the following:

- Underground cables.
- Manhole covers/drains.
- Overhead cables, including the following:
  Height
  - Type e.g Power, Electrical.
- Overhanging trees e.g. height of branches.
- The unit(s) will need to be lifted over other containers, fences, walls, buildings and any other obstacles.
- The unit(s) will need to go inside a building.
- The unit(s) to be double stacked on site

Failure to advise any of the above, may result in a full aborted delivery and collection charge.


#### LARGE STOCK | QUICK DELIVERY | FINANCE AVAILABLE

0800 9777 590 enguiries@unithire.co.uk | unithire.co.uk

## **RIGID DELIVERY REQUIREMENTS**

- A 11.75m = Length of lorry
- **B** 8m = Clear height of crane
- **C** 14m = Crane fully extended
- **D 3.8m** = Unloaded lorry height
- **E 3m** = Width of lorry
- F 8.4m = Width between stabiliser legs
- G 2.7m = Stabiliser leg fully extended
- H 10m = Clearance between end of load and electrical cables

D

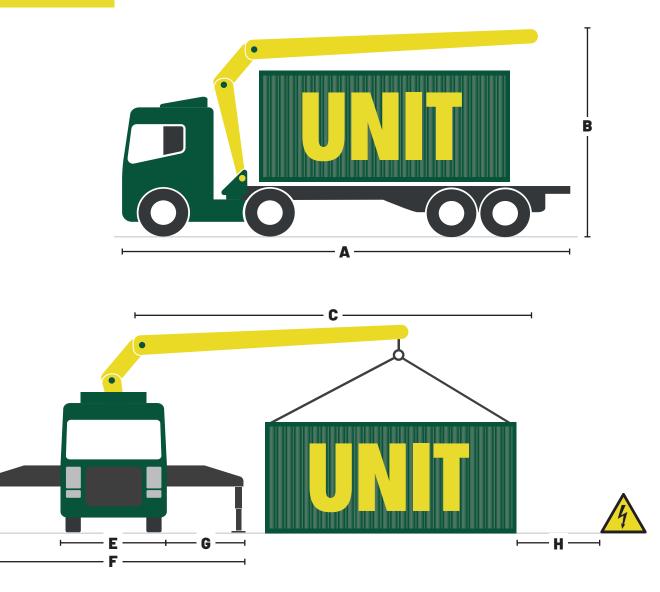

#### **IMPORTANT**


Groundworks are the customers responsibility. An abort fee will be applicable if the groundworks are not suitable for the haulier to drive on (i.e mud, ice etc).



## **RIGID WITH TRAILER DELIVERY REQUIREMENTS**

- A 18.75m = Length of lorry with trailer
- **B** 8m = Clear height of crane
- C 14m = Crane fully extended
- **D 3.8m** = Unloaded lorry height
- **E 3m** = Width of lorry
- **F** 8.4m = Width between stabiliser legs
- **G** 2.7m = Stabiliser leg fully extended
- H 10m = Clearance between end of load and electrical cables



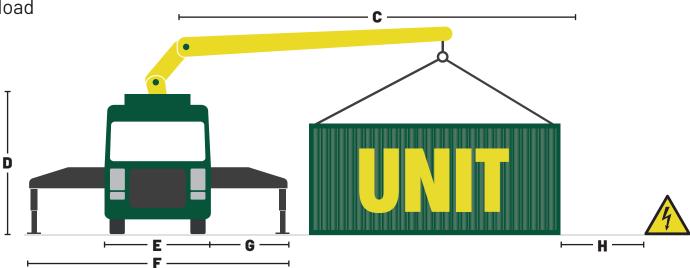

#### **IMPORTANT**


Groundworks are the customers responsibility. An abort fee will be applicable if the groundworks are not suitable for the haulier to drive on (i.e mud, ice etc).



## **ARTIC DELIVERY REQUIREMENTS**

- A 16.65m = Length of lorry
- **B** 8m = Clear height of crane
- C 16.2m = Crane fully extended
- **D 3.9m** = Unloaded lorry height
- **E 3m** = Width of lorry
- **F 9m** = Width between stabiliser legs
- **G 3m** = Stabiliser leg fully extended
- H 10m = Clearance between end of load and electrical cables



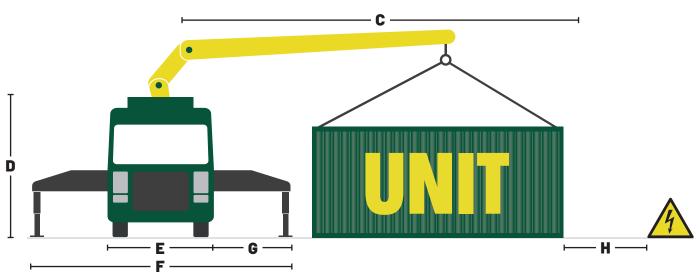

#### **IMPORTANT**

Groundworks are the customers responsibility. An abort fee will be applicable if the groundworks are not suitable for the haulier to drive on (i.e mud, ice etc).



## **SELF ASSESSMENT CHECKLIST**

Please complete and return prior to date of Delivery/Collection.

**IMPORTANT** 

UNT

Company Name	Contract Number	
Site Address	Job Date	
	Job Type	

Site Access/Conditions	Comments	
Does the haulier need to approach via a certain road/direction?	If yes, please provide details for	
Yes No	access.	
Are there any site restrictions? (eg. hanging trees, overhead cables, tight access, double yellow lines)	<b>If yes,</b> please provide images of restrictions.	
Yes No		
Are groundworks suitable for vehicle access?	Please provide details.	
Yes No	riease provide details.	
Does site require site specific RAMS?	<b>If yes</b> , a site visit will need to be organised which is chargeable. Please note all hauliers carry generic RAMS.	
Yes No		
Can we carry out the works during normal working hours? (8am- 6pm)	If no, please provide times.	
Yes No	Please note our hauliers charge a premium for timed works.	

It is the hirers responsibility to ensure access into site is clear prior to driver arival. On day of collection please ensure all units are empty and disconnected prior to arrival. This includes effluent tanks.

Signed:	Print Name:
Date:	Positon:

